TEMPORARY LED WORK LIGHT

- Built-in battery pack, rechargeable
- Outdoor portable lighting
- High Brightness
- DC24V





USB interface





Long battery life



0

Illuminating brightness Large range, high brightness, long range, long life of the bulb, The average service life is more than 50000 hours. Indoor and outdoor emergency lighting, with the characteristics of easy to carry, fast layout, is a good helper for emergency lighting. Aluminum radiator body. Air convection design between up and down of the lamp, promoting the heat dissipation function so that could ensure the lamp life span.

Features

Four style light modes:Gatling is a multiple portable light with four style light modes for different application.

360° mode: all the front and rear lights are on;
180° mode: the front half of the lights are on;
Top mode: the top of the lights are on

4. Warning light: It can be used for road rescue or for help

Built-in 18650 battery pack

The battery pack has a built-in battery IC chip management system, which can manage overcharge protection, over-discharge protection, discharge over-current protection, charging over-current protection, short circuit protection, over-temperature protection at charging and discharging points to protect personal safety during the use of lithium batteries.

Detachable power cord

The power cord is detachable. There is a charging port on the fixture, which can unplug the power cord when using the built-in battery. It is more convenient for mobile use. And there is also a USB power output port on the fixture, you can charge mobile electronic products.

Knob switch function

The left knob mainly controls the light mode like 360°/180°/spotlight/warnlight mode, the right knob mainly controls the product switch and brightness, and the power capacity can be checked in the middle of the knobs.

Different usages

Portable with your hands, hanging with hook, tripod stand for options




LED TEMPORARY WORK LIGHT

BBIER' www

DATA SHEET					
Power	50W				
Model	BB-HJD-50W-Q3				
Luminous Flux	Mode1: 7500lm \pm 10%;Mode2: 4000lm \pm 10%;Mode3: 2000lm \pm 10%				
Dimensions (Lamps)	Ø 165X428mm				
Net weight	2.2kg				
Luminous Efficacy	≥150Im/w				
Voltage	100-277VAC50/60Hz				
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW / 6500K SCW				
CRI	80+				
Battery capacity	14.8V/7800mAh				
USB output	5V/2A				
Charging time	8H				
Life Span	50,000 hours at 25 $^\circ \!\!\!\! \mathbb{C}$				
Operation Temp.	-40 to +45℃				
Driver	Internal Power Supply.				
Light Source	2835 SMD LED				
Beam Angle	360° or 180°				
Cover	Transparent cover(default)				
Lamp Base	1.Lifting hook;2.Lifting ring 3.With 4-8'tripod				
PF	>0.95				
Warranty	5Years				




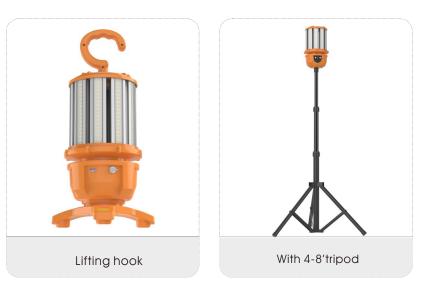



LED TEMPORARY WORK LIGHT

(*)BBIER

Dimension







Detail






▲ Cautions

- There are batteries inside, please do not squeeze or impact to prevent the battery from exploding.
- Do not immerse the lamp in water to prevent the battery from exploding.
- Please be careful to scalde your skin if you use the lamp for a long time.

Plug

Plug can be optional as required ,Please contact sales.

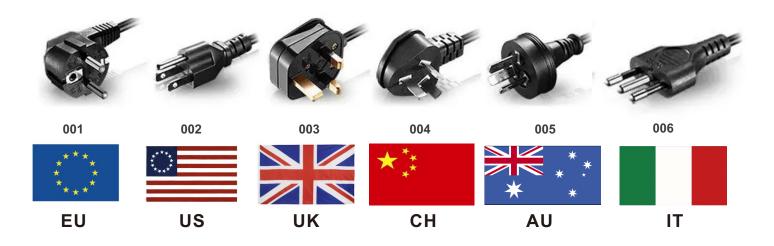

Tripod Stand

Tripod stand is optional(Adjustable height $0.6m \sim 1.6m$). Customers can choose according to their needs. If necessary, please contact sales.



Application case

Temporary lighting, engineering decoration, Indoor/outdoor temporary lighting, Camping lighting and so on



Packing info

Items	Packaging	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
50W	4pcs/CTN	430*430*420mm	9.4kg	10.5kg	15.5kg

